

# PFL28


120V, 120-277V

28" X 15" Square LED Ceiling Flushed Mounted Luminaire with 5CCT Selectable



Catalog #		Type
Project		Date
Prepared by		

## 28" X 15" Flush Mount LED

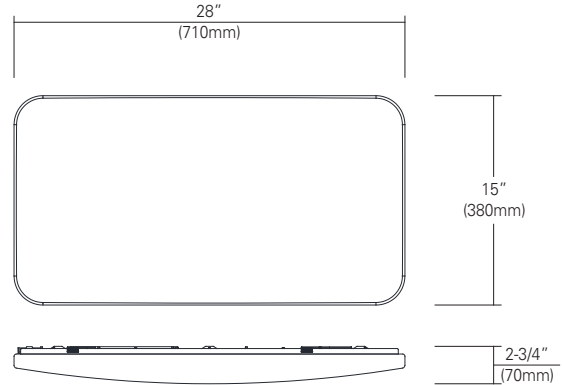

### DESCRIPTION

PFL28 is designed for the installation with ceiling flush mount with 4" ceiling J-Box. Specially layered light guide film and special optic lens delivers superior light distribution and even uniformity

### SPECIFICATION


HOUSING	PFL28
Wattage (Typ)	40W
Lumen (Typ)	3,000
Efficacy (LPW)	75 lm/W
CRI (Typical)	80, 90
Color (+/-5%)	2700K - 3000K - 4000K - 5000K - 6500K
Dimming	Triac(0-10V dim is also available optionally)

### FEATURES and FUNCTIONS

- Hard gauge metal backplate construction.
- Blown plastic diffuser delivers a perfect light distribution.
- Optic lens incorporating with each LED, which allows light to deliver more concisely and even uniformity on diffuser.
- 80CRI standard and 5 CCT selectable
- Triac dimming standard (0-10V dim is also available optionally)
- Isolated UL Listed/Recognized LED driver with dimming to 10%, minimum.

### 5 LIGHT SETTING BUTTON

- The 5 light Setting Button is located along the top edge side of the fixture that allows the color temperature of the light to adjusted Press button until desired color temperature is achieved.

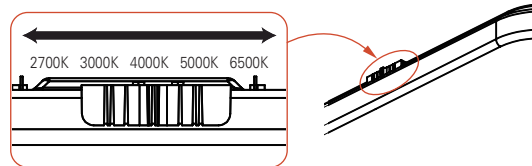

### Listing

- CSA-us Certificated
- Energy star Approved & Listed
- State of california Title 24
- Damp location

### Warranty

- 5years of lamp life.

### ORDERING INFORMATION

Housing	CRI	CCT	Driver	Finish
PFL28 28" X 15", 40W	8 80 9 90	27 2700K   30 3000K   40 4000K   50 5000K   65 6500K	UTD 120V, Triac Dimming (Standard) UZTD 120~277V, 0~10V Dimming	WH White

\*Consult with factory for custom finishes

Example : PFL28-830-UTD-WH

-  -  -