


AFC4


120V, 220V-230V and 277V

4" LED Recessed Retrofit-Kit with Interchangeable Trims



Catalog #		Type
Project		Date
Prepared by		

4" LED

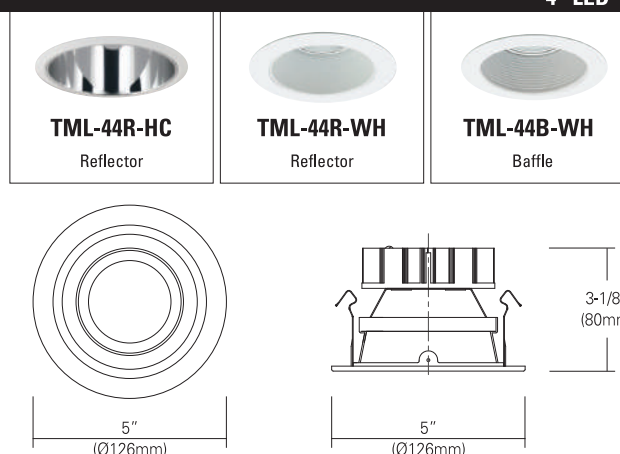

DESCRIPTION

The 4" Retrofit LED module & trim kit with E26 medium screw base for the 4" IC/Airtight and Non-IC incandescent recessed downlight and GU24 adaptor for CFL housing. It's designed for use with ISLT # DL-104, IC-104 and the remodeled including other compatible most 4" housings classified by CSA-us. High efficacy LED with integral dimmable driver and the optical diffusion produces high lumen transmission and even illumination. Suitable for wet location.

SPECIFICATION

Input Voltage	120V and 277V AC
Wattage (Typ)	10W
Lumen (Typ)	650 (90CRI)
Efficacy (LPW)	65 lm/W
Compatible Housing	See Housing Compatibility section
CRI (Typical)	80, 90
Color (+/-5%)	2700K, 3000K, 4000K
Dimming	Triac or 0-10V(Consult with factory for approved dimmers)

FEATURES and FUNCTIONS

- One piece light engine with durable heat sink and LED.
- Easy installation to housing by 3 crook clips to be compatible with most of cans.
- Trim changeable with easy snap-in fit.
- 120V AC LED module with integrated IC chip imbed on board.
- E26 adaptor is standard, optionally available in GU24 adaptor.
- Triac dimmable standard.

Listing

- CSA-us Certificated
- State of California Title 24
- Energy star Approved & Listed
- Damp location

Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	CRI	CCT	Trim	Reflector Finish	Baffle Finish
AFC4 4" LED Retrofit 10W	8 80	27 2700K	TML-44R Reflector	HC Haze Clear	WH White
	9 90	30 3000K 40 4000K	TML-44B Baffle	PR Pewter CP Champagne WH White *for TML-44R	BK Black *for TML-44B
*Consult with factory for custom finishes					
Example : AFC4-830			Example : TML-44R-HC-WH		
<input type="text"/> - <input type="text"/>			<input type="text"/> - <input type="text"/>		

HOUSING COMPATIBILITY

4" LED

4" Listed for installation in the following Ilslung E26 screw based 4" standard and shallow recessed housings;

- **ISLT** : DL-104, DL-104R, IC-104, ICF-104A-GU24, ICF-104RA-GU24 (GU24 base adapter only)


Classified for retrofit in the following 4" recessed housing;

- **H a l o** : H99T, H99RT, H99ICT
- **All-Pro** : ET400, ET400R, ET400AT
- **J u n o** : TC1, TC1R, IC1P
- **Capril** : R4, RR4, R4ASIC
- **Lithonia** : L3, L3R
- **Thomas** : PS4, PS4RM, PS4ASIC


UL 1598 COMPLETE DOWNLIGHT (with hard wiring)

* Sell Separately

Housing# : ICED-104

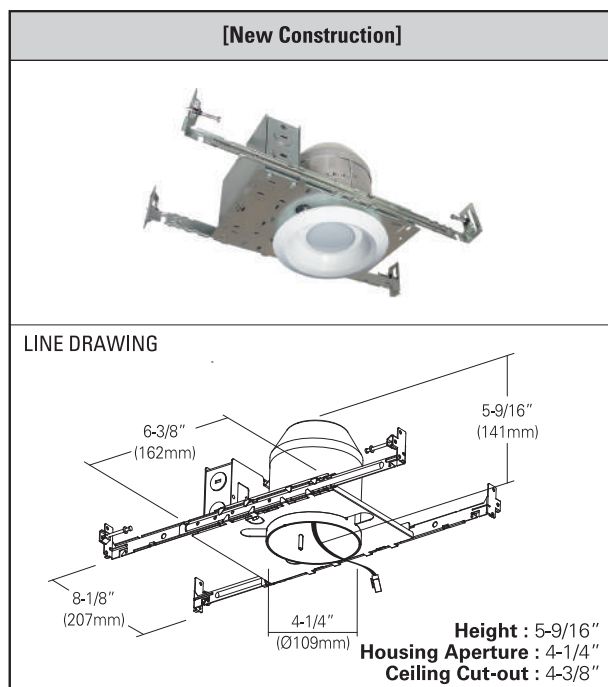

Housing# : ICED-104R

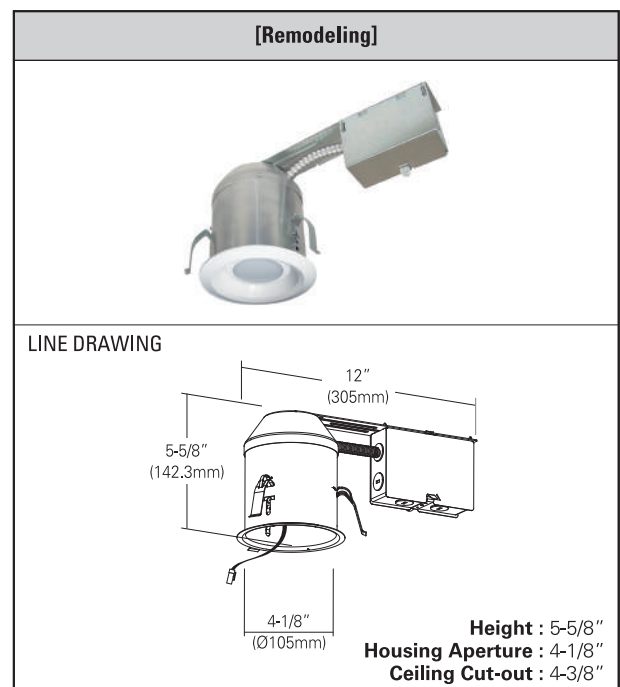

Applications: For use in insulated ceilings and can be installed in direct contact with insulation.
- Combine with most of ISLT's 4" LED Retrofit-Kit models.