


CFR


120V, 220V-230V and 277V

6" and 9" LED Round slim surface Recess Round Light



Catalog #		Type
Project		Date
Prepared by		

LED

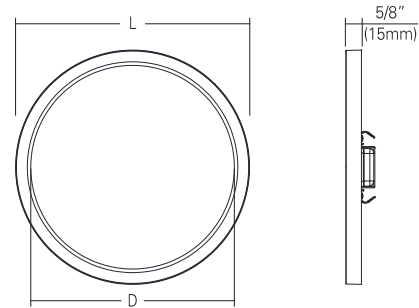

Dimension Table

Housing	[CFR56-15]	[CFR9-18]
Overall Diameter (L)	7-1/4" (Ø185mm)	9" (Ø230mm)
Diffuser Diameter (D)	6" (Ø153mm)	7-3/4" (Ø198mm)

DESCRIPTION

CFR series is designed for the installation with ceiling flush mount with its slim depth. It's designed to either use a direct 4" J-Box or allow exiting recessed can to be retrofitted by easy fit springs. Specially layered film/diffuser delivers superior light distribution and even uniformity.


SPECIFICATION

HOUSING	CFR6-15	CFR9-18
Wattage (Typ)	15W	18W
Lumen (Typ)	1,100(80CRI)	1,400(80CRI)
Efficacy (LPW)	73.5 lm/W	78 lm/W
Beam Angle	100°	
CRI (Typical)	80, 90	
Color (+/-5%)	2700K, 3000K, 3500K, 4000K, 5000K	
Dimming	Triac(Consult with factory for approved dimmers)	

FEATURES and FUNCTIONS

- 120V AC LED module with integrated IC chip imbed on board and 10-100% Triac dimming with most of leading and trailing edge dimmer switches in the market.
- Hard gauge metal back plate and the heat sink to facilitate heat dissipation.
- Mounting on 4" J-box with 2 screws from base plate.
- 90CRI Standard. Available in 2700K, 3000K, 3500K, 4000K and 5000K.
- Triac dimmable standard.

J-Box Mounting

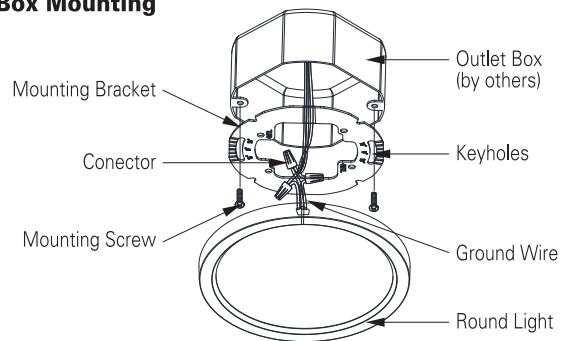

Listing

- CSA-us Certified
- Energy star Approved & Listed
- State of California Title 24
- Wet location

Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	CRI	CCT	Finish	Optional Kit for Recess Mount
CFR6-15 6", 15W	8 80	27 2700K	WH White	6MTL CFR6 & CFR9 kit for 6" Recess cans
CFR9-18 9", 18W	9 90	30 3000K	BK Black	
		35 3500K	SL Silver	
		40 4000K		
		50 5000K		

*Consult with factory for custom finishes

Example : CFR6-15-830-WH

- -