




# DLED-466S-DOB

5" Square Architectural Downlight  
15W & 20W LED, 120V ~ 277V Input



Catalog #		Type
Project		Date
Prepared by		

## 5" Architectural LED

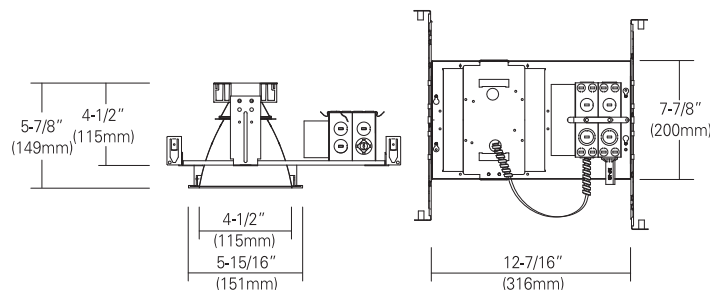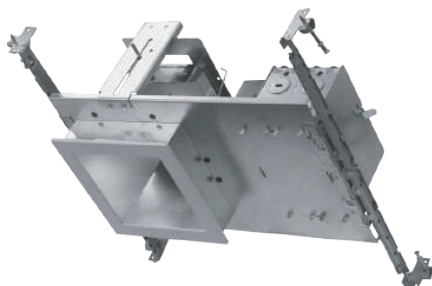

Ceiling Cut-out : 5-1/2" x 5-1/2"

### DESCRIPTION

5" Square Architectural Downlight combined with LED module and integral reflector. This is designed for use in non-insulated ceiling. Insulation material must be kept a minimum of 3" from fixture.

### SPECIFICATION

LED Quantity	1EA	
Input Voltage	120V ~ 277V AC	
Wattage (Typ)	15 W	20 W
Lumen (Typ)	1,050	1,400
Efficacy (LPW)	70 lm/W	70 lm/W
Beam Angle	20° / 40° / 70°	
C R I (Typical)	80, 90	
Color (+/-5%)	2700K, 3000K, 4000K, 5000K	
Dimming	Triac & 0-10V the both(Consult with factory for approved dimmers)	

### FEATURES and FUNCTIONS

- Galvanized steel construction.
- Housing adjusts for ceilings up to 1-1/4" thick.
- Aluminum extruded Heat sink designed to facilitate heat dissipation
- Heavy gauge aluminum reflector anodized in clear, haze, gold, champagne and pewter color finish.
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings. Housing can be positioned at any point within 24" joist span.
- Optional-Commercial mounting kit provided up to 5" vertical adjustment, which accommodates 1/2" EMT conduit, optional HB-24 or HBC-24 bar hanger or lathing channels for T-bar grid or concealed spline ceiling.
- 120~277V AC LED module with perfect dimming of Traic and 0-10V on one module.

### Listing

- CSA-us Certificated
- State of California Title 24
- Energy star Approved & Listed
- Damp location

### Warranty

- 5years of lamp life.

### ORDERING INFORMATION

Housing	Watts	CRI	CCT	Beam Angle	Trim	Reflector Finish	Metal Trim Ring Finish
DLED-466S-DOB 5", DOB	15 15W	8 80	27 2700K	N Narrow	TML-414S	HC Haze Clear	WH White
	20 20W	9 90	30 3000K 40 4000K 50 5000K	M Medium W Wide		WH White	BK Black
*Option - EM=Emergency battery backup					*Option-available in self-flanged(-SF)		
*Consult with factory for custom finishes							
Example : DLED-466S-DOB-15-830-W					Example : TML-414S-HC-WH		
[ ] - [ ] - [ ] - [ ]					[ ] - [ ] - [ ]		