

LVR


120V and 120V-277V

2ft and 4ft LED Vapor Tight Linear Fixture



Catalog #		Type
Project		Date
Prepared by		

Linear LED

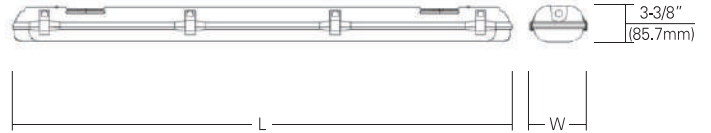

Dimension Table

Housing	[LVR2]	[LVR4]
L (Length)	25-9/16" (650mm)	49-5/8" (1,260mm)
W (Width)	3-1/4" (83mm)	5" (127mm)

DESCRIPTION

The long-lasting and energy-efficient wraparound type fixture provides a perfect for a variety of residential and commercial surface mounted application. Offering 2ft and 4ft and most commercial features such as universal voltage, 0-10V dimming, and quick surface and suspension mount. Suitable for the offices, schools, stairways, retail or other light commercial places.

SPECIFICATION

HOUSING	LVR2-20	LVR4-35	LVR4-50	LVR4-70
Wattage (Typ)	20W	35W	50W	70W
Lumen (Typ)	2,100	3,675	5,250	7,350
Efficacy (LPW)	105 lm/W	105 lm/W	105 lm/W	105 lm/W
CRI (Typical)	80			
Color (+/-5%)	4000K, 5000K, 5700K			
Dimming	0-10V (Consult with factory for approved dimmers)			

FEATURES and FUNCTIONS

- Single piece polycarbonate body and gasketed polycarbonate lens.
- IP65 rated against ingress of dust and water jets from all directions.
- LED module - Lumen maintenance of L82 at 50,000 life, and available in all CCTs with a CRI ≥ 80.
- Isolated UL Listed/Recognized LED driver with dimming to 10%, minimum.
- Microwave motion sensor, Daylight sensor and Occupancy sensor available.
- 0-10V dimming standard.
- Operating Temperature: -22°F to 122°F
- Surface mount with two removable, snap-in mounting brackets.
- Tool-less lens lock system for easy wiring access.
- 1/2" conduit access on either end.
- Gasketed UV resistant polycarbonate lens

Listing

- CSA-us Certificated
- State of California Title 24
- DLC qualified
- Wet location(IP65)

Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	Watts	CRI	CCT	Driver	Options
LVR2 2ft	20 20W	8 80	40 4000K	UTD 120V, Triac Dimming (Standard) UZTD 120~277V, 0~10V Dimming	MOS Microwave Motion Sensor, Daylight Sensor and Occupancy Sensor EMBB Emergency Battery Backup MOS-EMBB Both
LVR4 4ft	35 35W		50 5000K		
	50 50W		57 5700K		
	70 70W				

Example : LVR4-50-840-UTD

- - - -