


# LVT


120V ~ 277V

LED Vapor Tight Linear Fixture



Catalog #		Type
Project		Date
Prepared by		

**Linear LED**

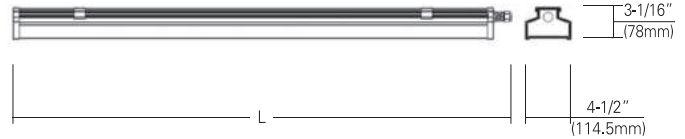

**Dimension Table**

Housing	[ LVT2-35 ]	[ LVT4-70 ]
L (Length)	25-11/16" (653mm)	49-5/16" (1,253mm)

**DESCRIPTION**

A cost effective and energy efficient alternative to fluorescents, the LED vapor Lock Fixture, features a full-length, gasketed polycarbonate lens and single piece non-corrosive (PC) Polycarbonate body. Designed to meet or exceed IP65 ratings against dust and pressurized water jets. Ideal for use as utility lighting in parking garage and stairwells, in tunnels or hallways, or anywhere meeting applicable building and safety codes. Effective advanced AC module in low profile and driverless along easy installation and cost effective.

**SPECIFICATION**

HOUSING	LVT2-35	LVT4-70
Wattage (Typ)	35W	70W
Lumen (Typ)	3,150	4,550
Efficacy (LPW)	90 lm/W	65 lm/W
Beam Angle	120°	
CRI (Typical)	80	
Color (+/-5%)	4000K, 5000K, 5700K	
Dimming	Triac & 0-10V the both(Consult with factory for approved dimmers)	

**FEATURES and FUNCTIONS**

- Single piece polycarbonate body and gasketed polycarbonate lens.
- IP65 rated against ingress of dust and water jets from all directions.
- 120V~277V AC LED module with integrated IC chip imbed on board.
- Microwave motion sensor available.
- 0-10V dimming standard.
- Operating Temperature: -22°F to 122°F
- Surface mount with two removable, snap-in mounting brackets.

**Listing**

- CSA-us Certificated
- State of California Title 24
- DLC qualified
- Wet location(IP65)

**Warranty**

- 5years of lamp life.

**ORDERING INFORMATION**

Housing	CRI	CCT	Finish
LVT2-35 2', 35W	8 80	40 4000K	WH White
LVT4-70 4', 70W		50 5000K	
		57 5700K	

\*Consult with factory for custom finishes

Example : LVT2-35-840-WH

-  -