


# UL1598 Downlight

## New Construction with 4", 6", 8", 9" NON-IC, Flat frame - kit

10W, 14W(15W), 20W(23W), 30W & 40W(45W) LED, 120V ~ 277V Input




|             |  |      |
|-------------|--|------|
| Catalog #   |  | Type |
| Project     |  | Date |
| Prepared by |  |      |

### New Construction Architectural LED



### LINE DRAWING

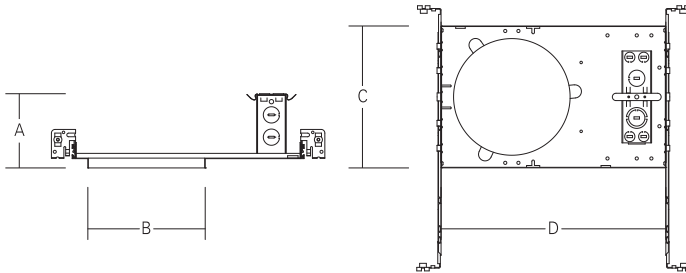

[ Table Dimension ]

| Model #        | A                    | B                   | C                   | D                    | Ceiling Cut-out |
|----------------|----------------------|---------------------|---------------------|----------------------|-----------------|
| <b>DLED-4"</b> | 4"<br>(101mm)        | 4-13/16"<br>(123mm) | 7-5/8"<br>(194mm)   | 12-1/16"<br>(307mm)  | 5"              |
| <b>DLED-6"</b> | 4"<br>(101mm)        | 6-5/16"<br>(160mm)  | 7-5/8"<br>(194mm)   | 12-1/16"<br>(307mm)  | 6-1/2"          |
| <b>DLED-8"</b> | 4-1/16"<br>(103.5mm) | 7-15/16"<br>(202mm) | 11-5/16"<br>(288mm) | 15-3/8"<br>(390mm)   | 8-1/8"          |
| <b>DLED-9"</b> | 6-1/8"<br>(156mm)    | 9-1/2"<br>(241mm)   | 11-5/16"<br>(288mm) | 21-1/8"<br>(536.5mm) | 9-3/4"          |

### DESCRIPTION

Those flat frame-in kits to combine with most of Ilsung's LED Retrofit-kit model #FRK, LFK and SFK series. This is designed for use in non-insulated ceiling. Insulation material must be kept a minimum of 3" from fixture.

### Listing

- CSA-us Certificated
- Energy star Approved & Listed
- State of California Title 24
- Damp location

### Warranty

- 5years of lamp life.

### FEATURES and FUNCTIONS

- Galvanized steel construction.
- Housing adjusts for ceilings up to 1/2" thick.
- Aluminum extruded Heat sink designed to facilitate heat dissipation
- Heavy gauge aluminum reflector anodized in clear, haze, gold, champagne and pewter color finish.
- (5)1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings. Housing can be positioned at any point within 24" joist span.

### ORDERING INFORMATION

| Housing  | Watts  | Driver   | Trim  |
|--|--|--|---|
| <b>DLED</b>  | <b>10</b> 10W<br><b>14 or 15</b> 14W or 15W<br><b>20 or 23</b> 20W or 23W<br><b>30</b> 30W<br><b>40 or 45</b> 40W or 45W<br>*4" is Max. 20W or 23W rated | <b>UTD</b> 120~277V AC,<br>Triac Dimming(Standard)<br><b>UZTD</b> 120~277V,<br>0~10V Dimming | <b>* Select trims for each Retrofit-Kit</b> |
| 4" -466<br>6" -666<br>8" -866<br>9" -966<br><br>*(-□66) : FRK Series / (-1□6L) : LKF Series / (-1□6F) : SFK Series |  | *Option - EM=Emergency battery backup  |   |
| <b>Example : DLED-466-14-UTD</b><br>□ - □ - □  |  | <b>Example : TML-149R-HC</b><br>□ - □ - □  |   |