


# OLN


## 120V, 220V-230V and 277V

LED Strip Luminaire with Continuous Row-Surface or Pendant Mounted




Catalog #		Type
Project		Date
Prepared by		

**Linear LED**

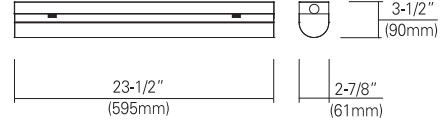

[ OLN24 ]

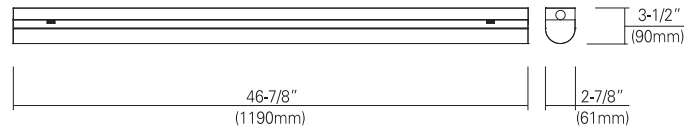

[ OLN48 ]

**DESCRIPTION**

The LED strip fixture is a cost effective, energy-efficient utility lighting fixture for surface-mount application such as corridors, stairwells, public room, school, hospital, utility, area etc. Engineered with stable performance LED engines and AC direct DOB solution. Aluminum heat sink designed to perform at warm ambient temperatures. Due to precision thermal engineering for maximum naturally convective cooling this fixture provides lumen drop that is less than fluorescent.

**SPECIFICATION**

HOUSING	OLN24-20	OLN48-40
Wattage (Typ)	20W	40W
Lumen (Typ)	2,100	4,200
Efficacy (LPW)	105 lm/W	105 lm/W
CRI (Typical)	80	
Color (+/-5%)	4000K, 5000K	
Dimming	Triac & 0-10V the both (Consult with factory for approved dimmers)	

**FEATURES and FUNCTIONS**

- Constructed of durable 22 gauge steel body in white coated paint and end cap.
- PC diffused patterned lens delivers a low-glare, and even uniformity.
- Two pieces structure to allow easy installation.
- 120V AC LED module with integrated IC chip imbed on board.
- 0-10V dimming standard.
- Designed to be either surface mounted or suspended with cable.
- Continuous row mountable to next fixtures.
- Finish - White Standard.

- Listing**
- CSA-us Certificated
  - DLC qualified
  - Damp location

- Warranty**
- 5years of lamp life.

**ORDERING INFORMATION**

Housing	CRI	CCT	Finish	Options
OLN24-20 24", 20W OLN48-40 48", 40W	8 80	40 4000K 50 5000K	WH White	<ul style="list-style-type: none"> <li>• Aircraft Cable (Variable Length)</li> <li>• Down-Rod adapter (#T-NUT)</li> <li>• Linkable</li> </ul>

Example : OLN24-20-840-WH

-  -