


SFR


120V, 220V-230V and 277V

4", 6", 11", 13" and 15" LED Slim Square surface & Retrofit DownLight



Catalog #		Type
Project		Date
Prepared by		

LED

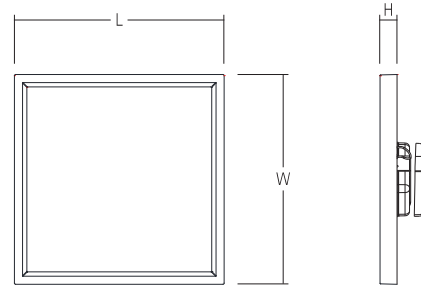

Dimension Table

Housing	[SFR4-10]	[SFR6-15]	[SF11-18]	[SFR13-23]	[SFR15-30]
L (Length)	4-15/16" (125mm)	7-5/16" (185mm)	11" (280mm)	13" (330mm)	15" (381mm)
W (Width)	4-15/16" (125mm)	7-5/16" (185mm)	11" (280mm)	13" (330mm)	15" (381mm)
H (Height)	9/16" (15mm)	9/16" (15mm)	1-1/8" (29mm)	1-1/8" (29mm)	1-1/8" (29mm)

DESCRIPTION

SFR series is designed for the installation with ceiling flush mount with its slim depth. It's designed to either use a direct 4" J-Box or allow exiting recessed can to be retrofitted by easy fit springs. Specially layered film/diffuser delivers superior light distribution and even uniformity.

SPECIFICATION

HOUSING	SFR4-10	SFR56-15	SFR11-18	SFR13-23	SFR15-30
Wattage (Typ)	10W	15W	18W	23W	30W
Lumen (Typ)	600(90CRI)	910(90CRI)	1,100(90CRI)	1,400(90CRI)	1,800(90CRI)
Efficacy (LPW)	60 lm/W	60.5 lm/W	61 lm/W	61 lm/W	60 lm/W
CRI (Typical)	80, 90				
Color (+/-5%)	2700K, 3000K, 3500K, 4000K, 5000K				
Dimming	Triac(Consult with factory for approved dimmers)				

** 11", 13", 15" has a trim frame in Aluminum

FEATURES and FUNCTIONS

- 120V AC LED module with integrated IC chip imbed on board and 10-100% Triac dimming with most of leading and trailing edge dimmer switches in the market.
- Hard gauge metal back plate and the heat sink to facilitate heat dissipation.
- PC diffused lens delivers perfect light distribution.
- 90CRI Standard. Available in 2700K, 3000K, 3500K, 4000K and 5000K.
- Triac dimmable standard.


Listing

- CSA-us Certified
- Energy star Approved & Listed
- State of california Title 24
- Wet location



Warranty

- 5years of lamp life.

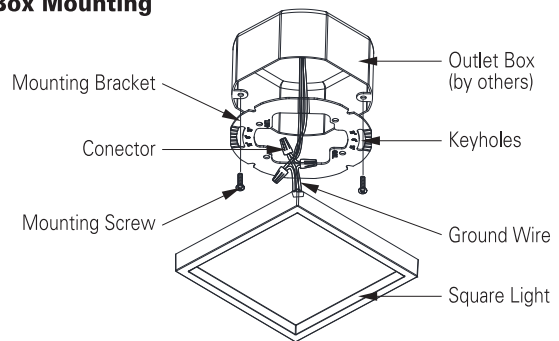J-Box Mounting



ORDERING INFORMATION

Housing	CRI	CCT	Finish	Optional Kit for Recess Mount
SFR4-10 4", 10W	8 80	27 2700K	WH White	4MTL SFR4 kit for 4" Recess cans  5,6MTL SFR6 kit for 5/6" Recess cans 
SFR6-15 6", 15W	9 90	30 3000K	BK Black	
SFR11-18 11", 18W		35 3500K	SL Silver	
SFR13-23 13", 23W		40 4000K		
SFR15-30 15", 30W		50 5000K		

*Consult with factory for custom finishes

Example : SFR4-10-927-WH

- -