


SLN


120V, 220V-230V and 277V

LED Profile Luminaire with Continuous Row-Surface or Pendant Mounted



Catalog #		Type
Project		Date
Prepared by		

Linear LED

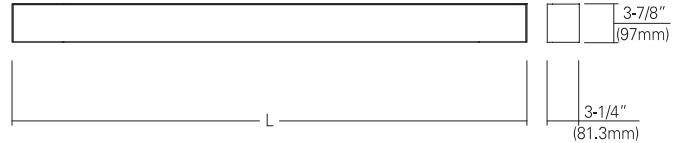

Dimension Table

Housing	[SLN24-20]	[SLN36-30]	[SLN48-40]
L (Length)	23-3/8" (593mm)	36" (915mm)	46-5/8" (1184mm)

DESCRIPTION

The LED strip fixture is a cost effective, energy-efficient utility lighting fixture for surface-mount application such as corridors, stairwells, public room, school, hospital, utility, area etc. Engineered with stable performance LED engines and AC direct DOB solution. Aluminum heat sink designed to perform at warm ambient temperatures. Due to precision thermal engineering for maximum naturally convective cooling this fixture provides lumen drop that is less than fluorescent.

SPECIFICATION

HOUSING	SLN24-20	SLN36-30	SLN48-40
Wattage (Typ)	20W	30W	40W
Lumen (Typ)	1,500	2,250	3,000
Efficacy (LPW)	75 lm/W	75 lm/W	75 lm/W
CRI (Typical)	80		
Color (+/-5%)	4000K, 5000K		
Dimming	Triac & 0-10V the both (Consult with factory for approved dimmers)		

FEATURES and FUNCTIONS

- Constructed of durable aluminum extrusion body in white coated paint and end caps.
- PC diffused patterned lens delivers a low-glare, and even uniformity.
- Two pieces structure to allow easy installation.
- 120V AC LED module with integrated IC chip imbed on board.
- 0-10V dimming standard.
- Designed to be either surface mounted or suspended with cable.
- Continuous row mountable to next fixtures.
- Finish - White Standard.

Listing

- CSA-us Certificated
- Energy star Approved & Listed
- Damp location

Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	CRI	CCT	Finish	Options
SLN24-20 24", 20W	8 80	40 4000K	WH White	<ul style="list-style-type: none"> • Aircraft Cable (Variable Length) • Linkable
SLN36-30 36", 30W		50 5000K		
SLN48-40 48", 40W				
*Consult with factory for custom finishes				

Example : SLN24-20-840-WH

- -