


VRPD


120V, 220V-230V and 277V

LED Eurowrap Liner fixture with Continuous Row-Surface or Pendant Mounted



Catalog #		Type
Project		Date
Prepared by		

LED

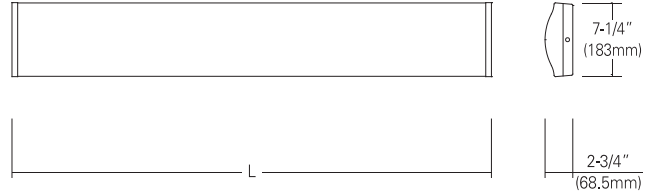

Dimension Table

Housing	[VRPD2-20]	[VRPD4-30]
L (Length)	23-3/8" (593mm)	46-3/4" (1,186mm)

DESCRIPTION

The long-lasting, energy-efficient WRAP is perfect for a variety of residential and commercial surface mount application. Its AC Direct DOB make it to save some space and light weight to easy installation and full length diffuser in geometry allows for even light distribution.

SPECIFICATION

HOUSING	VRPD2-20	VRPD4-30
Wattage (Typ)	20W	30W
Lumen (Typ)	1,400(80CRI)	2,100(80CRI)
Efficacy (LPW)	70 lm/W	70 lm/W
CRI (Typical)	80, 90	
Color (+/-5%)	3000K, 4000K, 5000K	
Dimming	Triac and 0-10V the both	

FEATURES and FUNCTION

- Constructed of durable 22 gauge steel body in white coated paint and end cap.
- PC diffused pattered lens delivers a low-glare, and even uniformity.
- Two pieces structure to allow easy installation.
- 120V AC LED module with intergrated IC chip imbed on board.
- 0-10V dimming standard.
- Optionally available in sensor.
- Finish - White Standard.

Listing

- CSA-us Certificated
- State of California Title 24
- Energy star Approved & Listed
- Damp location

Warranty

- 5years of lamp life.

ORDERING INFORMATION

* Consult with factory for approved dimmers

Housing	CRI	CCT	Finish
VRPD2-20 2', 20W	8 80	30 3000K	WH White
VRPD4-30 4', 30W	9 90	40 4000K	
		50 5000K	

*Consult with factory for custom finishes

Example : VRPD2-20-840-WH

- -