


OUTDOOR Light

WCED-4(U)D(P)

120V, 220V-230V and 277V

4" LED Wall & Pendant Mount Cylinder Light (Up/Down & Down Type)



Catalog #		Type
Project		Date
Prepared by		

4" LED Cylinder




WCED-4D
(DOWN TYPE)



WCED-4UD
(UP/DOWN TYPE)



WCED-4DP
(PENDANT DOWN TYPE)

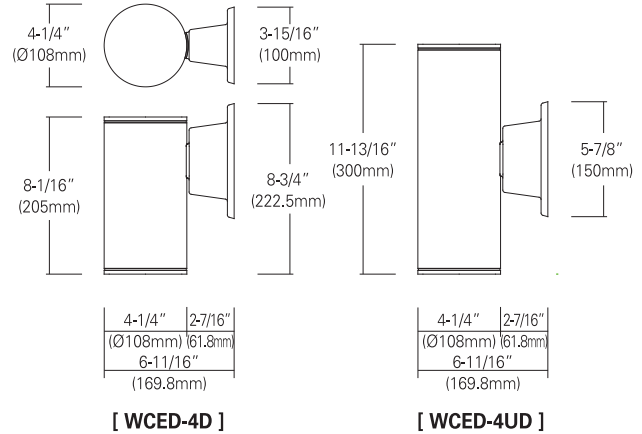

DESCRIPTION
Wet location(IP65) rated outdoor use round cylinder type wall or pendant mount with downlight and up & down light. 13W, 17W and 27W LED AC module by customized IC, embedded circuit on board for full (5% lowest) dimming by most of Triac or 0-10V dimming switches in the market. Low heat, long life running from DOB technology can warrant more than 5 years in weather change circumstances with (-30°C ~ +40°C) range.

SPECIFICATION			
HOUSING	WCED-4(U)D(P)		
Wattage (Typ)	13W	17W	27W
Lumen (Typ)	910(80CRI)	1,190(80CRI)	1,890(80CRI)
Efficacy (LPW)	70 lm/W	70 lm/W	70 lm/W
Beam Angle	11° / 22° / 37°		
CRI (Typical)	80, 90		
Color (+/-5%)	2700K, 3000K, 3500K, 4000K, 5000K		
Dimming	Triac & 0-10V the both(Consult with factory for approved dimmers)		

FEATURES and FUNCTIONS

- Main body by weather proof aluminum powder coated white, black and silver finish for outdoor/indoor applications
- 13W, 17W and 27W 120V DOB modules with integrated circuit on board with customized chips (No driver needed)
- Hanging aircraft cable is standard. Also available in stem rod(For down type only)
- Also available in photocell sensor and day light harvest.
- 80, 90 CRI, 2700K, 3000K, 3500K, 4000K and 5000K
- Triac dimming is standard. Also available 0-10V dimming.

- Listing**
- CSA-us Certificated
 - State of california Title 24
 - Energy star Approved & Listed
 - Wet location (IP65 Rated)

- Provided**
- SENSOR



Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	Watts	CRI	CCT	Beam Angle	Housing Finish	Aircraft Cable Length	Option
WCED-4D Down Type	13 13W	8 80	27 2700K	N 11°	WH White	12 12 Inches	PCR Photocell Sensor
WCED-4UD Up / Down Type	17 17W	9 90	30 3000K	M 22°	BK Black	18 18 Inches	
WCED-4DP Pendant Down Type	27 27W		35 3500K	W 37°	SI Silver	24 24 Inches	
			40 4000K			36 36 Inches	
			50 5000K			48 48 Inches	
						*Consult with factory for custom finishes	*For pendant Mount Only

Example : WCED-4UD-17-840-M-WH

[] - [] - [] - [] - [] - []