



# OUTDOOR Light BULKHAED



120V, 220V-230V and 277V  
LED Wall Mount & Ceiling Fixture

Catalog #		Type
Project		Date
Prepared by		

Wall LED

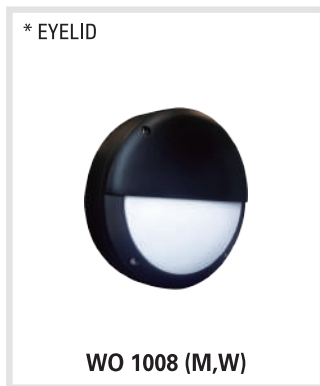

## FEATURES and FUNCTIONS

- Durable die-cast housing with fully seated with silicon gasket.
- 120V AC LED module with integrated IC chip imbed on board and 10-100% Triac dimming with most of leading and trailing edge dimmer switches in the market.  
Also available with 220V-230V AC module.
- PC diffused lens delivers perfect light distribution.
- 80, 90 CRI, 2700K, 3000K, 4000K and 5000K
- Installed 3.5", 4" J-box in the wall ceiling directly by simple quick disconnecter.

### Listing

- CSA-us Certificated
- State of california Title 24
- Energy star Approved & Listed
- Wet location

### Warranty

- 5years of lamp life.

## SPECIFICATION

HOUSING	WO 1008(M)	WO 1008(W)	WO 1010(M)	WO 1010(W)	WO 1011(M)	WO 1011(W)	WO 1044D
Shade Diameter	8-7/8" (Ø)	10-15/16" (Ø)	8-7/8" (Ø)	10-15/16" (Ø)	8-7/8" (Ø)	10-15/16" (Ø)	14" (Square)
Depth (D)	2-15/16"	3-3/16"	3-3/16"	3-1/2"	2-3/4"	3-1/16"	4-3/16"
Wattage (Typ)	15W	23W	15W	23W	15W	23W	23W
Lumen (Typ)	650(90CRI)	850(90CRI)	700(90CRI)	950(90CRI)	850(90CRI)	1,000(90CRI)	1,000(90CRI)
Efficacy (LPW)	43.5 lm/W	40 lm/W	46.5 lm/W	41.5 lm/W	56.5 lm/W	43.5 lm/W	43.5 lm/W
CRI (Typical)	80, 90						
Color (+/-5%)	2700K, 3000K, 4000K, 5000K						
Dimming	Triac(Consult with factory for approved dimmers)						

## ORDERING INFORMATION

Housing	Dimension	CRI	CCT	Finish
WO 1008 9" or 11"	M-15 or W-23 M-15W or W-23W	8 80	27 2700K	WH White
WO 1010 9" or 11"	M-15 or W-23 M-15W or W-23W	9 90	30 3000K	BK Black
WO 1011 9" or 11"	M-15 or W-23 M-15W or W-23W		40 4000K	SL Silver
WO 1044 14"	D-23 D-23W		50 5000K	BZ Bronze
				OB Oil Brush

\*Consult with factory for custom finishes

Example : WO 1088-M-15-830-BK

-  -  -