DL-8561A

6" Flat Frame Internally Adjustable Wall Wash & Directional PAR30, R30 Lamp


| Catalog # | Туре |
|-------------|------|
| Project | Date |
| Prepared by | |

INCANDESCENT



- DESCRIPTION

The 6" with wall wash reflector with convex lens for smooth illumination on vertical surface, or with open wall wash slope reflector for PAR lamp directional $0 \sim 42^\circ$ tilt and 358° rotation with positive locking.

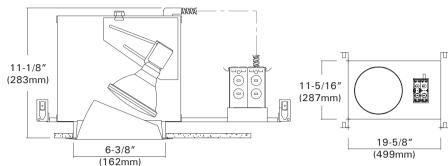

DESIGN FEATURES

Housing

- C-UL listed, NON-IC, thermally protected housing for vertical PAR30, R30 incandescent lamps.
- Black painted heavy metal housing and compact frames designed to fit in commercial / architectural construction.
- 1-5/8" deep collar may use for various thickness of ceiling materials.

Junction Box

- Listed for through branch circuit wiring.(Max.8 No 12 AWG 90℃ branch circuit conductors. (4 in, 4 out)
- (5)1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

Bar Hangers

- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings.
- Housing can be positioned at any point within 24" joist span.
- Score lines allow "tooless" shortening for 12" joists. Bar hangers may be repositioned 90 degrees.
- Integral T-bar clips snaps onto T-bars-no additional clips required.

Trims

 Lens wall wash and open wall wash reflectors, also available slope baffle trims.

Optional mounting Channel Bracket

 Commercial mounting kit provided up to 5" vertical adjustment, which accommodates 1/2" EMT conduit, optional HB-24 or HBC-24 bar hanger or lathing channels for T-bar grid or concealed spline ceiling.

Direction adjustment

 Adjustable lamp direction in 358° rotation and 0~42° tilt with positive locking mechanism in adjustable bracket.

Thermal Protector

 Self resetting thermal detertor on J-box deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

* Listing

- UL, c-UL listed for damp location.
- UL, c-UL listed for feed through.

• Just-A-Nail

Adjustable nail hanger bar for easy alignment.

Lamp, Max, Watt.: 150W / PAR30, R30





Ceiling Cut-out: 6-1/2"

JUST-A-NAIL

 Pre-installed nail bars with vertical slots are used to evenly align the bars horizontally after nailing halfway into wood joists.

ILSUNGMOOLSAN

Trims

6" Internally Adjustable Wall Wash Trims For

DL-8560A, DL-8561A, DL-8560H, DL-8561H, DL-8560TH

| Catalog # | Туре |
|-------------|------|
| Project | Date |
| Prepared by | |

INCANDESCENT & METAL HALIDE

TM-625B

Slope Baffle PAR30, T4.5 or T6

White Metal Trim Ring O.D: 7-1/4"



TM-625B-WH TM-625B-BK

TM-625R

Slope Clear Reflector PAR30, T4.5 or T6

White Metal Trim Ring O.D: 7-1/4"



TM-625R-HC

TM-625BG

Slope Baffle w/ Convex Prismatic Lens PAR30, T4.5 or T6

White Metal Trim Ring O.D: 7-1/4"




TM-625BG-WH

TM-625BG-BK

TM-625RG

Slope Reflector w/ Convex Prismatic Lens PAR30, T4.5 or T6

White Metal Trim Ring O.D: 7-1/4"



TM-625RG-HC

TM-655B

Straight Baffle PAR30, T4.5 or T6

White Metal Trim Ring O.D: 7-1/4"



TM-655B-WH

TM-655B-BK

TM-655R

Straight Reflector PAR30, T4.5 or T6

White Metal Trim Ring O.D: 7-1/4"



TM-655R-HC

ORDERING INFORMATION

Choose the catalog / finish codes that best suit your needs and enter it on the appropriate line.

| TRIM MODEL | REFLECTOR | LENS | BAFFLE | METAL RING |
|------------|--------------------|----------------------|--------------------|--------------------|
| | CL :Clear | FR :Fresnel | WH :White | WH :White |
| | WH :White | AS :All Sanded | BK :Black | BK :Black |
| | GD :Gold | CL :Clear | SN :Satin Nickel | SN :Satin Nickel |
| | MA :Matte Platinum | CV :Convex Prismatic | AN :Antique Nickel | AN :Antique Nickel |
| | CP :Champagne | AL :Albalite | AC :Antique Copper | AC :Antique Copper |
| | PR :Pewter | SPL:Comfort Linear | MO :Mocha | MO :Mocha |
| | HC :Haze Clear | | CA :Cappuccino | CA :Cappuccino |
| | | | CH :Chrome | CH :Chrome |
| | | | UN :Natural Steel | UN :Natural Steel |
| | | | PB :Polished Brass | PB :Polished Brass |

Examples:

TM-625R-HC-WH = White Trim Ring w/ Slope Clear Reflector

TM-655R-HC-WH = White Trim Ring w/ Straight Haze Clear Reflector