
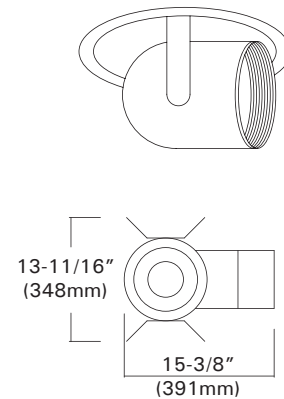


DL-9260A

6" Pull Down Adjustable For PAR30 Lamps

| | | |
|-------------|--|------|
| Catalog # | | Type |
| Project | | Date |
| Prepared by | | |

INCANDESCENT

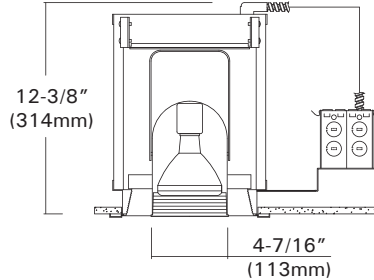

DESCRIPTION

Pull Down Directional lamp housing for PAR30 offers flexible accents from recessed source, adjusting 0°~ 80° Vertical to horizontal directions.

DESIGN FEATURES

Ceiling Cut-out : 6-1/2"
Lamp, Max, Watt. : 75W PAR30

◦ Housing

- C-UL listed, NON-IC, thermally protected housing for vertical PAR30 incandescent lamp.
- Black painted heavy metal housing and compact frames designed to fit in commercial / architectural construction.

◦ Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90°C branch circuit conductors. (4 in, 4 out))
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

◦ Mounting Channel Bracket

- Commercial mounting kit provided up to 5" vertical adjustment, which accommodates 1/2" EMT conduit, optional HB-24 or HBC-24 bar hanger or lathing channels for T-bar grid or concealed spline ceiling.

◦ Trim

- Included black or white check baffle in the lamp head and white metal thin ring in the aperture.

◦ Direction adjustment

- Adjustable lamp position for fully recessed as down lighting, semi-recessed spot light or bullet spot light.
- Lamp may adjust from 0°~ 80° vertically and rotate 358° when pulled fully down.

◦ Thermal Protector

- Self resetting thermal detector on J-box deactivates fixture if overheating occurs due to improper lamping or mis-applied insulation.

* Listing

- UL, c-UL listed for damp location.

Ordering Information

| Housing | Baffle Finish | Option |
|----------|----------------------------|--------|
| DL-9260A | -WH : White -BK : Black | |

Example : DL-9260A-WH