
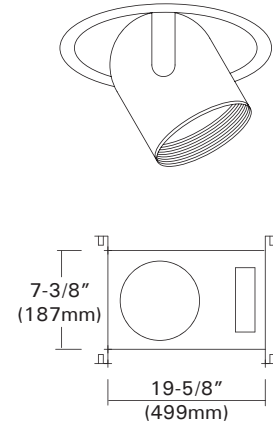


DLH-9251A/DL-9251

5" Flat Frame with Pull Down Adjustable For Halogen MR16 and PAR16/20 Lamps

Catalog #		Type
Project		Date
Prepared by		

HALOGEN & INCANDESCENT

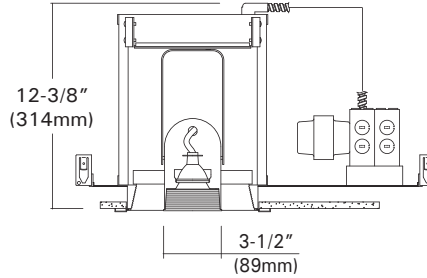

DESCRIPTION

Pull Down Directional lamp housing for MR16, PAR16 or PAR20 offers flexible accents from recessed source, adjusting 0°~ 80°. Vertical to horizontal directions.

Ceiling Cut-out : 5-11/16"
Lamp, Max, Watt. : 75W / MR16
 60W / PAR16
 50W / PAR20

DESIGN FEATURES

◦ Housing

- C-UL listed, NON-IC, thermally protected housing for vertical PAR16/20 incandescent lamp and MR16 halogen lamp installed with magnetic or electronic transformer on j-box.
- Black painted heavy metal housing and compact frames designed to fit in commercial / architectural construction.

◦ Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90°C branch circuit conductors. (4 in, 4 out)
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

◦ Bar Hangers

- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings.
- Housing can be positioned at any point within 24" joist span.
- Score lines allow "toolless" shortening for 12" joists. Bar hangers may be repositioned 90 degrees.
- Integral T-bar clips snaps onto T-bars and no additional clips are required.

◦ Trim

- Included black or white check baffle in the lamp head and white metal thin ring in the aperture.

◦ Direction adjustment

- Adjustable lamp position for fully recessed as down lighting, semi-recessed spot light or bullet spot light.
- Lamp may adjust from 0°~ 80° vertically and rotate 358° when pulled fully down.

◦ Thermal Protector

- Self resetting thermal detector on J-box deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

* Listing

- UL, c-UL listed for damp location.

* Optional "Mounting Channel Bracket"

- Commercial mounting kit provided up to 5" vertical adjustment, which accommodates 1/2" EMT conduit, optional HBC-24 bar hanger or lathing channels for T-bar grid or concealed spline ceiling.

Ordering Information

Housing	Transformer	Voltage	Baffle Finish	Option
DLH-9251 (Halogen Low Voltage)	-E50 : 50W Electronic -M50 : 50W Magnetic -E75 : 75W Electronic -M75 : 75W Magnetic	-Blank : 120V -27 : 277V	-WH : White -BK : Black	-CB : Multiple Channel Bracket
DL-9251A (Incandescent)	N/A	N/A		

Example : DLH-9251-M50-WH
 DL-9251A-WH