
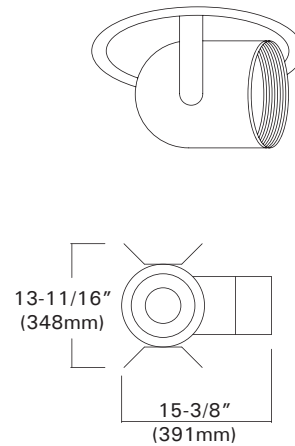


DL-9260H

6" Architectural Pull Down Adjustable For PAR30 CMH Lamp

Catalog #		Type
Project		Date
Prepared by		

METAL HALIDE

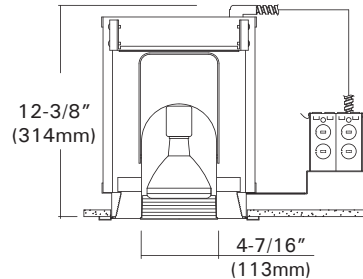

DESCRIPTION

Pull Down Directional lamp housing for max. 70W PAR30 CMH lamps offers flexible accents from recessed source, adjusting 0°~ 80°. Vertical to horizontal directions.

DESIGN FEATURES

◦ Housing

- C-UL listed, NON-IC, thermally protected housing for vertical PAR30 CMH lamp.
- Painted heavy metal housing and compact frames designed to fit in commercial / architectural construction.

◦ Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90°C branch circuit conductors. (4 in, 4 out)
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

◦ Mounting Channel Bracket

- Commercial mounting kit provided up to 5" vertical adjustment, which accommodates 1/2" EMT conduit, optional HB-24 or HBC-24 bar hanger or lathing channels for T-bar grid or concealed spline ceiling.

◦ Trim

- Included black or white check baffle in the lamp head and white metal thin ring in the aperture.

◦ Direction adjustment

- Adjustable lamp position for fully recessed as down lighting, semi-recessed spot light or bullet spot light.
- Lamp may adjust from 0°~ 80° vertically and rotate 358° when pulled fully down.

◦ Electronic Ballast

- 120 and 277 volts for 50/60Hz operation high power factor.
- Class A sound rated.
- These frames may install only electronic ballast and can be provided with magnetic ballast in a remote box.

◦ Thermal Protector

- Self resetting thermal detector on J-box deactivates fixture if overheating occurs due to improper lamping or mis-applied insulation.

* Listing

- UL, c-UL listed for damp location.

Ceiling Cut-out : 6-1/2"

Lamp, Max, Watt. : 70W / PAR30 CMH

Ordering Information

Housing	Ballast	Lamp(s) Watt.	Baffle Finish	Voltage
<div>DL-9260H</div>	<div>-E : HID Electronic Ballast</div>	<div>39 : 39W 70 : 70W</div>	<div>-WH : White -BK : Black</div>	<div>-Blank : 120V -27 : 277V</div>

Example : DL-9260H-E70-WH