

# DLF-966

## 10" NON-IC Flat Frame-in-kit For

(1)13W, 18W, 26W, 32W, 42W, 57W or 70W DTT/TTT Lamps


Catalog #		Type
Project		Date
Prepared by		

### FLUORESCENT



#### DESCRIPTION

10" aperture flat frame-in kits for (1) vertical CFL lamps.  
These are designed for use in non-insulated ceiling for general and task lighting.  
Heat sink aluminium socket housing, with vertically adjustable lamp holder may produce various focuses for different lamp types.

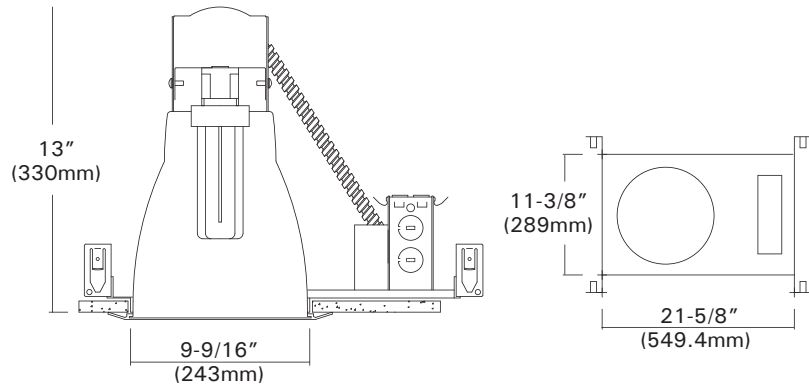

#### DESIGN FEATURES

Ceiling Cut-out : 9-3/4"  
Lamp, Max, Watt. : Max. 70W

##### • Mounting Frame

- Galvanized steel construction.
- Housing adjusts for ceilings up to 1-5/8" thick.

##### • Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90°C branch circuit conductors. (4 in, 4 out)
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

##### • Reflector

- Anodized clear, haze, gold, champagne, pewter color finished full reflectors. And anodized reflectors with black or white milled groove baffle collar and glass Lens for shower trim.

##### • Bar hangers

- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings.
- Housing can be positioned at any point within 24" joist span.
- Score lines allow "toeless" shortening for 12" joists. Bar hangers may be repositioned 90 degrees.
- Integral T-bar clips snaps onto T-bars and no additional clips are required.

##### • Trim Ring

- White plastic ring or plated chrome, satin nickel, natural steel color ring.

##### • Socket

- G24Q/GX24Q socket for use 4 pin DTT, TTT lamps.

##### • Socket Cup

- Heat sink aluminum cup with vertically adjustable lampholder is used to control multiple beam spreads.

##### • Lamp

- Compact Fluorescent lamps.
  - \* DTT-Double twin tube (Quad/CFQ)
    - (1) 13W DTT (4 pin)
    - (1) 18W DTT (4 pin)
    - (1) 26W DTT (4 pin)
  - \* TTT-Triple Twin Tube (CFTR)
    - (1) 18W TTT (4 pin)
    - (1) 26W TTT (4 pin)
    - (1) 32W TTT (4 pin)
    - (1) 42W TTT (4 pin)
    - (1) 57W TTT (4 pin)
    - (1) 70W TTT (4 pin)

##### • Ballast


- Class P Thermally protected by internal fuse (3 amp fast blow), Multi-volt electronic ballast or thermal cut-out switch in magnetic ballast.
- High Power Factor Multi-volt Electronic ballasts for 4 pin type compact fluorescent lamps mounted on J-box door for easy access from inside of fixture.

##### • Listing

- UL, c-UL listed for damp location.
- UL, c-UL listed for feed through.

##### • Just-A-Nail

Adjustable nail hanger bar for easy alignment.

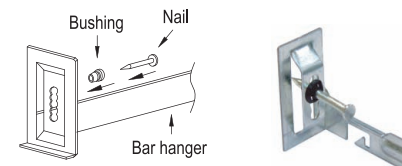

##### JUST-A-NAIL

- Pre-installed nail bars with vertical slots are used to evenly align the bars horizontally after nailing halfway into wood joists.

##### • Optional "Quick Connect" Push-in wire connectors.

- Three "Quick Connectors"
- Pre-installed push-in wire connectors for fast and easy wiring.

#### Ordering Information

Housing	Ballast	Lamp(s) Watt.	Option
DLF-966	-N : 120V NPF Magnetic -H : 120V HPF Magnetic -NE : 120V NPF Electronic -HE : 120V HPF Electronic	113 : (1)13W 142 : (1)42W 118 : (1)18W 157 : (1)57W 126 : (1)26W 170 : (1)70W 132 : (1)32W	-EM : Emergency w/ Remote Test Switch -C : Quick Connectors

Example : DLF-966-E142

# Trims

## 10" Vertical Compact Fluorescent Trims For

DLF-966, DLF-196, DLF-196R

Catalog #		Type
Project		Date
Prepared by		

### FLUORESCENT

#### TM-199R TM-199RF



**Specular Open Reflector**  
**70W TTT, DTT**

White Plastic Trim Ring

O.D : 11-1/4"

Height : 9-1/2"

\*Symbol (RF) is for Self-flange



TM-199R-HC

TM-199R-GD

TM-199RF-HC

#### TM-190B

**Baffle w/ Reflector**  
**70W TTT, DTT**

White Plastic Trim Ring

O.D : 11-1/4"

Height : 9-1/2"



TM-190B-WH

TM-190B-BK

#### TM-198

**Reflector w/ Frosted Drop Lens**  
**70W TTT, DTT**

White Metal Trim Ring

O.D : 11-1/4"

Height : 9-1/2"



TM-198-HC


#### TM-196B

**Baffle w/ Frosted Flat Lens**  
**57W TTT, DTT**

White Plastic Trim Ring

O.D : 11-1/4"

Height : 9-1/2"



TM-196B-WH

TM-196B-BK

#### TM-198S

**Reflector w/ Frosted 3.5" Center Hole Lens**  
**70W TTT, DTT**

White Metal Trim Ring

O.D : 11-1/4"

Height : 9-1/2"



TM-198S-HC

#### TM-196R

**Reflector w/ Frosted Flat Lens**  
**57W TTT, DTT**

White Plastic Trim Ring

O.D : 11-1/4"

Height : 9-1/2"



TM-196R-CL

- ◆ White plastic ring standard. Also available with metal rings.
- ◆ All trims are damp location, Lens trims are wet location listed.

### ORDERING INFORMATION

Choose the catalog / finish codes that best suit your needs and enter it on the appropriate line.

TRIM MODEL	REFLECTOR	LENS	BAFFLE	METAL RING
	CL :Clear	AS :All Sanded	WH :White	WH :White
	WH :White	CL :Clear	BK :Black	BK :Black
	GD :Gold	CS :Center Part Sanded	SN :Satin Nickel	SN :Satin Nickel
	MA :Matte Platinum		AN :Antique Nickel	AN :Antique Nickel
	CP :Champagne		AC :Antique Copper	AC :Antique Copper
	PR :Pewter		MO :Mocha	MO :Mocha
	HC :Semi-Matte Clear		CA :Cappuccino	CA :Cappuccino
			CH :Chrome	CH :Chrome
			UN :Natural Steel	UN :Natural Steel
			PB :Polished Brass	PB :Polished Brass

Examples:

TM-199R-HC = Haze Clear Reflector

TM-190B-BK = Black Baffle w/ Clear Reflector