


# DLF-926

## 10" NON-IC Horizontal Architectural Frame-in kit For

(1) or (2) DTT/TTT Lamps

Catalog #		Type
Project		Date
Prepared by		

**FLUORESCENT**

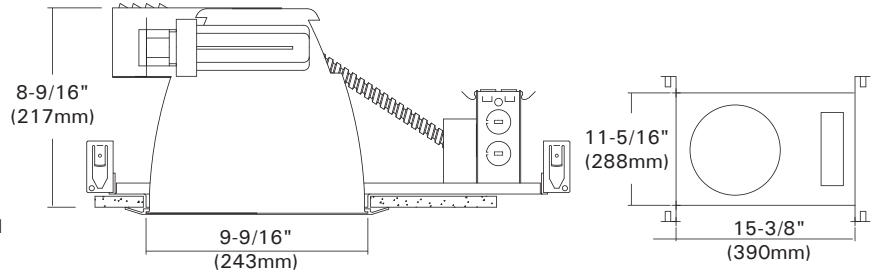

### DESCRIPTION

The DLF-926 is a 10" aperture frame-in kit for (1) or (2) horizontal CFL lamps.

The DLF-926 is designed for use in non-insulated existing ceiling or for existing insulated ceilings where insulation can be kept 3" from all sides of the housing. The DLF-926 offers a wide choice of trim types including reflector, lensed and wall wash trims.

### DESIGN FEATURES

Ceiling Cut-out : 9-3/4"  
Lamp, Max, Watt. : (1)57W or (2)57W

#### • Mounting Frame

- Galvanized steel construction.
- Housing adjusts for ceilings up to 1-1/4" thick.

#### • Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90°C branch circuit conductors. (4 in, 4 out)
- (5)1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

#### • Reflector

- Anodized clear, haze, gold, champagne, pewter color finished full reflectors. And anodized reflectors with black or white milled groove baffle collar.

#### • Trim Ring

- White plastic ring or plated chrome, satin nickel, polished brass, natural steel color

#### • Bar hangers

- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings.
- Housing can be positioned at any point within 24" joist span.
- Score lines allow "toolless" shortening for 12" joists. Bar hangers may be repositioned 90 degrees.
- Integral T-bar clips snaps onto T-bars and no additional clips are required.

#### • Socket

- G24Q/GX24Q socket for use 4 pin DTT, TTT lamps.

#### • Socket Housing

- Installed (4 pin) thermoplastic lampholders in stamped galvanized steel housing attached on the reflector top.

#### • Lamp

Compact Fluorescent lamps.

\* DTT-Double twin tube (Quad/CFQ)

- (1) or (2) 13W DTT (4 pin)
- (1) or (2) 18W DTT (4 pin)
- (1) or (2) 26W DTT (4 pin)

\* TTT-Triple Twin Tube (CFTR)

- (2) 26W TTT (4 pin)
- (2) 32W TTT (4 pin)
- (2) 42W TTT (4 pin)
- (2) 57W TTT (4 pin)
- (1) 32W TTT (4 pin)
- (1) 42W TTT (4 pin)
- (1) 57W TTT (4 pin)

#### • Ballast


- Class P Thermally protected by internal fuse (3 amp fast blow), Multi-volt electronic ballast or thermal cut-out switch in magnetic ballast.
- High Power Factor Multi-volt Electronic ballasts for 4 pin type compact fluorescent lamps mounted on J-box door for easy access form inside of fixture.

#### \* Listing

- UL, c-UL listed for damp location.
- UL, c-UL listed for feed through.

#### • Just-A-Nail

Adjustable nail hanger bar for easy alignment.

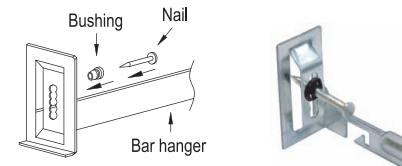

**JUST-A-NAIL**

- Pre-installed nail bars with vertical slots are used to evenly align the bars horizontally after nailing halfway into wood joists.

#### • Optional "Quick Connect" Push-in wire connectors.

- Three "Quick Connectors"
- Pre-installed push-in wire connectors for fast and easy wiring.

### Ordering Information

Housing	Ballast	Lamp(s) Watt.	Option
DLF-926	-N : 120V NPF Magnetic -H : 120V HPF Magnetic -NE : 120V NPF Electronic -HE : 120V HPF Electronic	-E : 120V/277V HPF Electronic  126 : (1)26W    226 : (2)26W 132 : (1)32W    232 : (2)32W 142 : (1)42W    242 : (2)42W 157 : (1)57W    257 : (2)57W	-EM : Emergency w/ Remote Test Switch -C : Quick Connectors

Example : DLF-926-E232

# Trims

## 10" Horizontal Compact Fluorescent Trims For

DLF-916, DLF-916R, DLF-926

Catalog #		Type
Project		Date
Prepared by		

**FLUORESCENT**

### TM-99R TM-99RF


**Specular Open Reflector**  
2x57W TTT, 1x57W TTT

White Plastic Trim Ring

O.D : 11-1/4"

Height : 8-3/4"

\*Symbol (RF) is for Self-flange



### TM-90B

**Baffle w/ Reflector**  
2x57W TTT, 1x57W TTT

White Plastic Trim Ring

O.D : 11-1/4"

Height : 8-3/4"



### TM-98

**Reflector w/ Frosted Drop Lens**  
2x57W TTT, 1x57W TTT

White Metal Trim Ring

O.D : 11-1/4"

Height : 8-3/4"




### TM-96B

**Baffle w/ Frosted Flat Lens**  
2x57W TTT, 1x57W TTT

White Plastic Trim Ring

O.D : 11-1/4"

Height : 8-3/4"

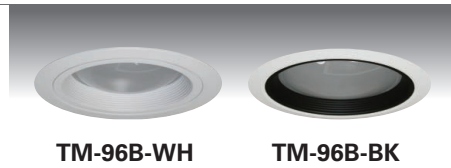

### TM-98S

**Reflector w/ Frosted 3.5" Center Hole Lens**  
2x57W TTT, 1x57W TTT

White Metal Trim Ring

O.D : 11-1/4"

Height : 8-3/4"



### TM-96R

**Reflector w/ Frosted Flat Lens**  
2x57W TTT, 1x57W TTT

White Plastic Trim Ring

O.D : 11-1/4"

Height : 8-3/4"



- ◆ White plastic ring standard. Also available with metal rings.
- ◆ All trims are damp location, Lens trims are wet location listed.

## ORDERING INFORMATION

Choose the catalog / finish codes that best suit your needs and enter it on the appropriate line.

TRIM MODEL	REFLECTOR	LENS	BAFFLE	METAL RING
	CL :Clear	AS :All Sanded	WH :White	WH :White
	WH :White	CL :Clear	BK :Black	BK :Black
	GD :Gold	CS :Center Part Sanded	SN :Satin Nickel	SN :Satin Nickel
	MA :Matte Platinum		AN :Antique Nickel	AN :Antique Nickel
	CP :Champagne		AC :Antique Copper	AC :Antique Copper
	PR :Pewter		MO :Mocha	MO :Mocha
	HC :Haze Clear		CA :Cappuccino	CA :Cappuccino
			CH :Chrome	CH :Chrome
			UN :Natural Steel	UN :Natural Steel
			PB :Polished Brass	PB :Polished Brass

Examples:

TM-99R-HC-WP = Haze Clear Reflector

TM-90B-BK-WP = Black Baffle w/ Clear Reflector