

ICF-104A-GU24

4"IC/AIR TIGHT Recessed Housing For 13W GU24 Base Compact Fluorescent

T24
2005

Catalog #


Type

Project

Date

Prepared by

FLUORESCENT

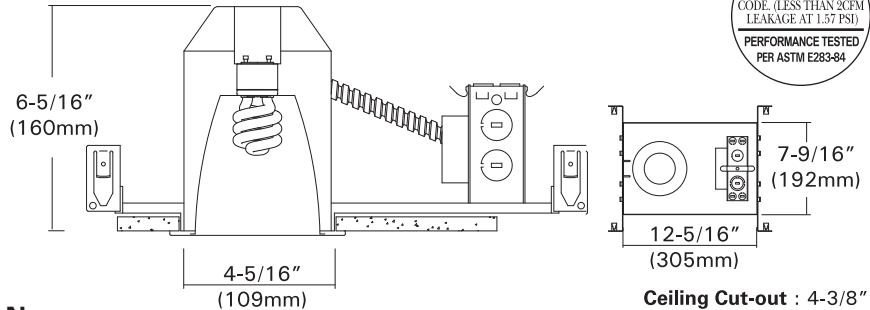

Ceiling Cut-out : 4-3/8"
Lamp, Max, Watt. : 13W

DESCRIPTION & APPLICATION

The ICF-104A-GU24 is designed for insulated ceilings and can be in direct contact with insulation material. The AIR-TIGHT housing design prevents airflow through the ceiling, helping save on heating and cooling costs. The ICF-104A-GU24 offers a wide choice of trim types including reflector, lensed and wall wash trims.

DESIGN FEATURES

• Housing

- Single wall aluminum housing.
- 6-5/16" height allows use in 2" x 8" joist construction.
- Housing adjusts for ceilings up to 1-1/4" thick.
- AIR-TIGHT installation gasket included in J-box.

• Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 60°C branch circuit conductors. (4 in, 4 out)
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

• Socket

- GU24 base socket
- (2) legs spring clip snaps into socket hole on the top of all of type "A" trims.

• Bar Hangers

- Maximum extension of 24" allows for extra distance between joists.
- Housing can be positioned at any point within 24" joist span.
- Score lines allow "toolless" shortening for 12" joists. Bar hangers may be repositioned 90 degrees.
- Integral T-bar clips snaps onto T-bars and no additional clips are required.

• Just-A-Nail

- Pre-installed nail bars with vertical slots are used to evenly align the bars horizontally after nailing halfway into wood joists.

• Trims

- All trims with various shapes with baffle collar, shower lens and reflector finished in clear, gold, pewter, champagne.

• Lamp


- Self Ballasted with GU24 Base
- Compact Fluorescent lamps.
- Generic 13W lamp designations.

* Listing

- cCSA-us certificated.

• Just-A-Nail

Adjustable nail hanger bar for easy alignment.

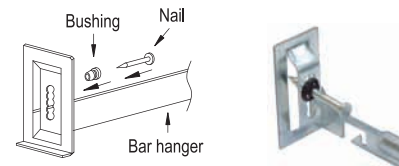

JUST-A-NAIL

• Optional "Quick Connect" Push-in wire connectors.

- Three "Quick Connectors"
- Pre-installed push-in wire connectors for fast and easy wiring.

• Compliance

- Washington state energy code.
- New York state energy conservation construction code.
- Certified AIR-TIGHT under ASTM E283.

Ordering Information

Housing	Lamp(s) Watt.	Ballast	Option
ICF-104A-GU24	113 : (1)13W		- C : Quick Connectors

Trims

4" Compact Fluorescent Trims For

DLF-104, DLF-104R, ICF-104A(-GU24), ICF-104RA(-GU24), ICF-204A

Catalog #		Type
Project		Date
Prepared by		

FLUORESCENT

TM-214B Full Baffle
DLF-104 26W DTT, TTT
DLF-104R
ICF-204A
ICF-104A 18W DTT, TTT
ICF-104RA
ICF-104(R)A-GU24 13W GU24
 White Metal Trim Ring
 O.D : 4-7/8"




TM-219R Specular Reflector Cone
DLF-104 26W DTT, TTT
DLF-104R
ICF-204A
ICF-104A 18W DTT, TTT
ICF-104RA
ICF-104(R)A-GU24 13W GU24
 White Metal Trim Ring
 O.D : 4-7/8"



TM-1215 Fresnel Lens (w/ Reflector)
 18W DTT, TTT
 White Metal Trim Ring
 O.D : 4-7/8"




TM-1213 Frosted Lens w/ Clear Center (w/ Reflector)
 18W DTT, TTT
 White Metal Trim Ring
 O.D : 4-7/8"

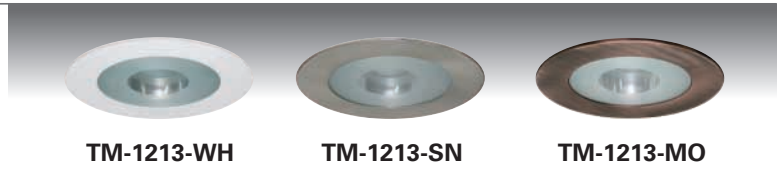

TM-1217 Albalite Lens (w/ Reflector)
 18W DTT, TTT
 White Metal Trim Ring
 O.D : 4-7/8"



TM-1216 (w/ Reflector) Shower Drop Opal Lens
 18W DTT, TTT
 White Metal Trim Ring
 O.D : 4-7/8"

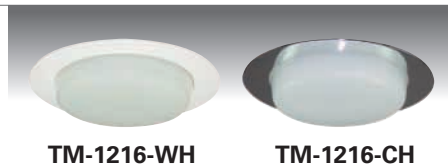

TM-225R Wall Wash w/ Reflector
DLF-104 26W DTT, TTT
DLF-104R
ICF-204A
ICF-104A 18W DTT, TTT
ICF-104RA
 White Metal Trim Ring
 O.D : 4-7/8"



ORDERING INFORMATION

Choose the catalog / finish codes that best suit your needs and enter it on the appropriate line.

TRIM MODEL	REFLECTOR	BAFFLE	METAL RING
	CL :Clear	WH :White	WH :White
	WH :White	BK :Black	BK :Black
	GD :Gold	SN :Satin Nickel	SN :Satin Nickel
	MA :Matte Platinum	AN :Antique Nickel	AN :Antique Nickel
	CP :Champagne	AC :Antique Copper	AC :Antique Copper
	PR :Pewter	MO :Mocha	MO :Mocha
	HC :Haze Clear	CA :Cappuccino	CA :Cappuccino
		CH :Chrome	CH :Chrome
		UN :Natural Steel	UN :Natural Steel
		PB :Polished Brass	PB :Polished Brass

Examples:

TM-1215-WH = Fresnel Lens w/ White Metal Ring
 TM-1217-WH = Albalite Lens w/ White Metal Ring