
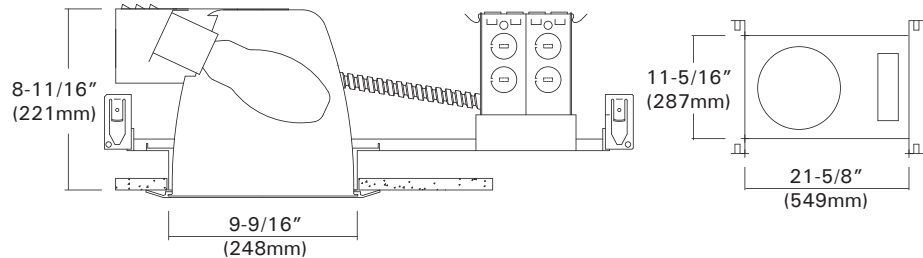


# DL-9235A

## 10" NON-IC Horizontal Flat Frame-in kit For Incandescent Lamps

Catalog #		Type
Project		Date
Prepared by		

INCANDESCENT

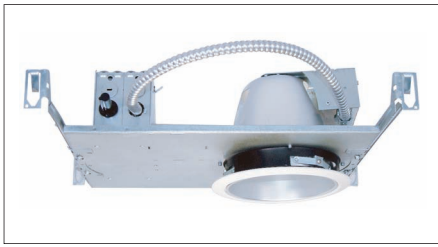

### DESCRIPTION

10" aperture flat frame-in kits for horizontal A, PS Type incandescent lamps. These are designed for use in non-insulated ceiling for general lights on floor and task lighting with deep concealed lamps.

### DESIGN FEATURES

#### • Housing Kit

- C-UL listed, NON-IC, thermally protected housing for horizontal A, PS type incandescent lamps.
- 1-5/8" deep collar may use for various thickness of ceiling.

#### • Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90°C branch circuit conductors. (4 in, 4 out)
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

#### • Reflector

- Anodized clear, haze, gold, champagne, pewter color finished full reflectors. And anodized reflectors with black or white milled groove baffle collar.

#### • Trim Ring

- White metal ring plated chrome, satin nickel, natural steel color ring.

#### • Socket

- Medium base porcelain socket with nickel plated screw shell.

#### • Bar Hangers

- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings.
- Housing can be positioned at any point within 24" joist span.
- Score lines allow "toolless" shortening for 12" joists. Bar hangers may be repositioned 90 degrees.
- Integral T-bar clips snaps onto T-bars and no additional clips are required.

#### • Thermal Protector


- Self resetting thermal detector on J-box deactivates fixture if overheating occurs due to improper lamping or mis-applied insulation.
- Install varied detectors according to input voltages.

#### \* Listing

- UL, c-UL listed for damp location.
- UL, c-UL listed for feed through.

#### • Just-A-Nail

Adjustable nail hanger bar for easy alignment.

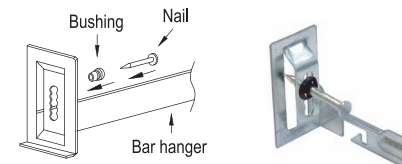

#### JUST-A-NAIL

- Pre-installed nail bars with vertical slots are used to evenly align the bars horizontally after nailing halfway into wood joists.

#### \* Optional" Mounting Channel Bracket"

- Commercial mounting kit provided up to 5" vertical adjustment, which accommodates 1/2" EMT conduit, optional HB-24 or HBC-24 bar hanger or lathing channels for T-bar grid or concealed spline ceiling.

# Trims



## 10" Horizontal Incandescent Trims For

DL-9235A, DL-1935A, DL-1935RA

Catalog #		Type
Project		Date
Prepared by		

### INCANDESCENT

**TM-99R-H**  
**TM-99RF-H**  
**Specular Open Reflector**  
**300W PS25**  
**250W A23 or 150W A19**  
 White Metal Trim Ring  
 O.D : 11-1/4"  
 Height : 8-3/4"  
 \*Symbol (RF) is for Self-flange

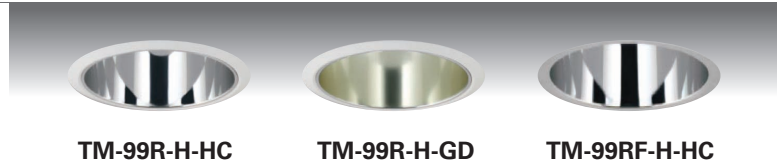


**TM-90B-H**  
**Baffle w/ Reflector**  
**300W PS25**  
**250W A23 or 150W A19**  
 White Metal Trim Ring  
 O.D : 11-1/4"  
 Height : 8-3/4"



**TM-98-H**  
**Reflector w/ Frosted Drop Lens**  
**150W A21**  
 White Metal Trim Ring  
 O.D : 11-1/4"  
 Height : 8-3/4"



**TM-96B-H**  
**Baffle w/ Frosted Lens**  
**150W A21**  
 White Metal Trim Ring  
 O.D : 11-1/4"  
 Height : 8-3/4"

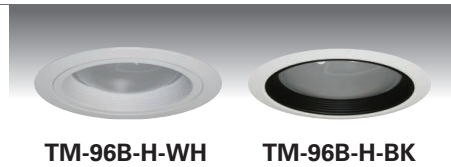

**TM-98S-H**  
**Reflector w/ Frosted 3.5" Center Hole Lens**  
**150W A21**  
 White Metal Trim Ring  
 O.D : 11-1/4"  
 Height : 8-3/4"



**TM-96R-H**  
**Reflector w/ Frosted Lens**  
**150W A21**  
 White Metal Trim Ring  
 O.D : 11-1/4"  
 Height : 8-3/4"



- ◆ White metal ring standard.
- ◆ All trims are damp location, Lens trims are wet location listed.

### ORDERING INFORMATION

Choose the catalog / finish codes that best suit your needs and enter it on the appropriate line.

TRIM MODEL	REFLECTOR	LENS	BAFFLE	METAL RING
	CL :Clear	AS :All Sanded	WH :White	WH :White
	WH :White	CL :Clear	BK :Black	BK :Black
	GD :Gold	CS :Center Part Sanded	SN :Satin Nickel	SN :Satin Nickel
	MA :Matte Platinum		AN :Antique Nickel	AN :Antique Nickel
	CP :Champagne		AC :Antique Copper	AC :Antique Copper
	PR :Pewter		MO :Mocha	MO :Mocha
	HC :Haze Clear		CA :Cappuccino	CA :Cappuccino
			CH :Chrome	CH :Chrome
			UN :Natural Steel	UN :Natural Steel
			PB :Polished Brass	PB :Polished Brass

Examples:  
 TM-99R-H-HC-WH = Haze Clear Reflector  
 TM-90B-H-BK-WH = Black Baffle w/ Clear Reflector